JAMECO™
ELECTRONIC COMPONENTS
COMPUTER PRODUCTS

Part No. 28871
Product No. PS9250
50 Watt Switching Power Supply

Features:

- **Output:** +5V @ 6.0A; +12V @ 1A ; -5V @ 0.5A;-12V @ 1A
- **Input:** 115V @ 60Hz/230V @ 50Hz
- **Size:** 7.75"L x 4.25" W x 2"H
- **Weight:** 1lb.

The 28871 power supply can operate at either 115V or 230V inputs. The power supply is pre-set to operate at 115V. If you wish to operate the power supply at 230V, please follow the steps below.

1. Rotate the power supply so that it is oriented in the same direction as the picture below. Locate the voltage jumper pins. The 115V jumper pin will be covered by a grey jumper attached to a black wire.

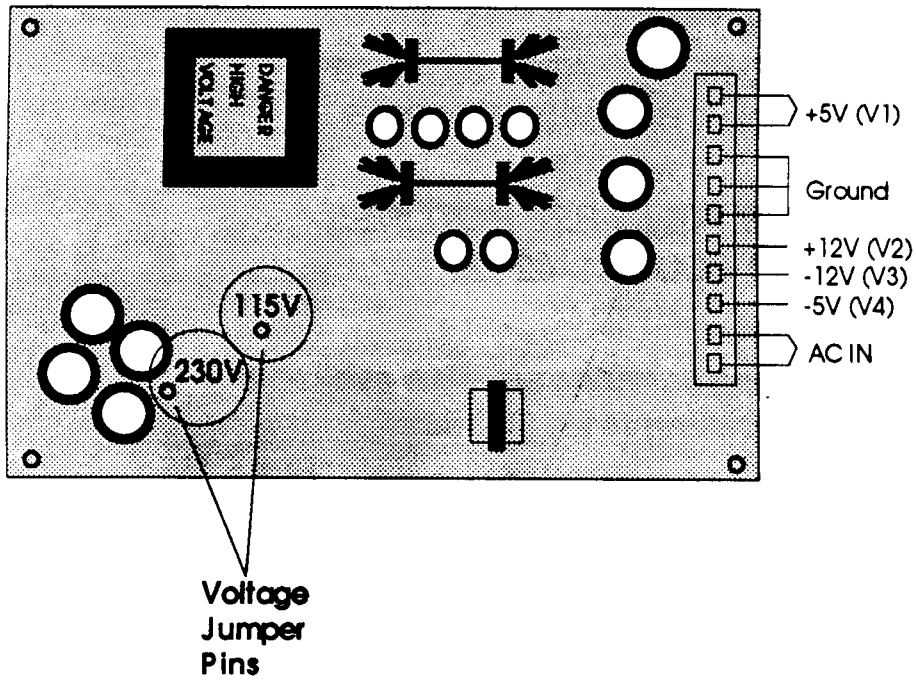

2. Remove the jumper from the 115V jumper pin.

3. Place the jumper over the 230V jumper pin.

11-01-93